


CENTRAL ELECTRIC POWER ASSOCIATION MOBILE HOMES and TEMPORARY SERVICES

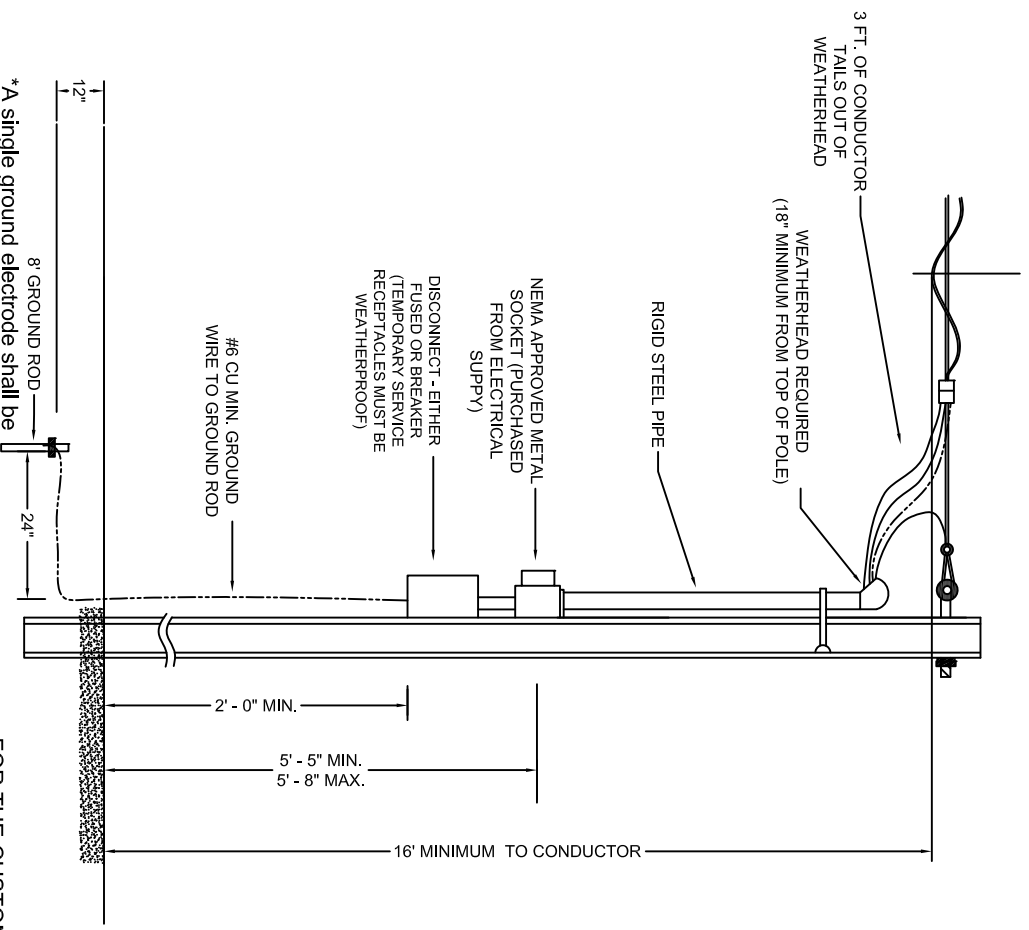

* A single ground electrode shall be supplemented by an additional electrode when the single electrode does not have a resistance to earth of 25 ohms or less.

FOR THE CUSTOMER'S SAFETY,
WIRING INSTALLATIONS SHALL
CONFORM TO THE REQUIREMENTS
OF THE NEC AND NESC.

*200 AMP METER BASE MUST BE MIN. OF
2/0 COPPER OR 4/0 ALUMINUM FOR ENTRANCE
CABLE

*100 AMP METER BASE MUST BE MIN. OF
#4 COPPER OR #2 ALUMINUM FOR ENTRANCE
CABLE

*SERVICES TO MOBILE HOMES NEED 4 WIRE
APPLIANCE GROUND FROM SWITCH BOX TO
SWITCH BOX

*200 AMP SERVICE - #4 COATED COPPER
WIRE FROM NEUTRAL BAR ON POLE TO
SWITCH BOX INSIDE MOBILE HOME IN PIPE

*100 AMP SERVICE - #6 COATED COPPER
WIRE FROM NEUTRAL BAR ON POLE TO
SWITCH BOX INSIDE MOBILE HOME IN PIPE